



## EW-10000 HD [Heavy Duty]

Rated Line Pull: 10000 lbs. (4532kg) Single-Line  
 Motor: 6.6 hp/12V Series-Wound  
 Control: Remote Switch, 12' Lead (3.7m)  
 Gear Train: 3-Stage Planetary  
 Gear Ratio: 218:1  
 Clutch: Sliding Ring Gear  
 Brake: Automatic In-The-Drum  
 Drum Size: Diameter 2.5" Length 8.8" (61 x 224mm)  
 Wire Rope: 94', <sup>23</sup>/<sub>64</sub>" Diameter (28.5m. 9.2mm Diameter)  
 Fairlead: 4-Way Roller Fairlead  
 Remote Control: Included  
 Recommended Battery: 650CCA Minimum for Winching  
**Battery Leads:** 35mm<sup>2</sup>, 72" (1.83m)  
 Finish: Black/Dark Gray  
 Weight: 84 lbs. (38kg)  
**Overall Dimensions:** (L x W x H) 21.15" x 6.3" x 8.6" (537 x 160 x 218mm)  
 Mounting Bolt Pattern: 10.00±0.015" x 4.50±0.010" (254 x 114.3mm)

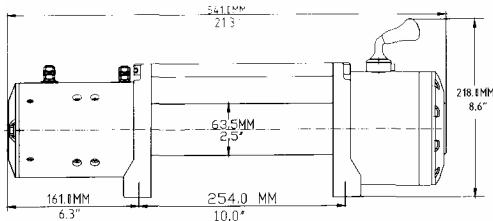

(L x W x H) 21.3" x 6.3" x 8.6"

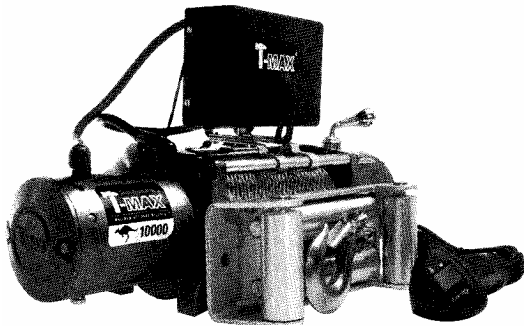

### EW-10000 HD

10000 lbs. (4532kg) Rated Single Line Pull.  
 New 6.6 hp/12V Series-Wound Motor.  
 94' (28.5m) of <sup>23</sup>/<sub>64</sub>" (9.2mm) Galvanized  
 Aircraft Cable with Replaceable Clevis hook.

#### Line Speed & Amp Draw-First layer

Line Lbs	L	No	2000	400	6000	8000	10000
Pull kqs		-oad	910	0	2720	3630	4532
Line fpm	12V ;	9.5	14.4	11.9	9.85	8.7	7.2
Speed	12V	9	4.4	3.6	3	2.65	2.2
Motor amps	12V	70	170	240	310	380	425
Current							

#### Line Pull & Cable Capacity

Layer of		1	2	3	4
Rated Line	lbs.	10000	8633	7716	7089
Pull	kqs	4532	3913	3497	3213
Cable	ft.	16	42	72	94
Capacity	m	5	12	21	28

(L x W x H) 21.15" x 6.3" x 8.6"



National Association of Testing Authorities, Australia



**MAXIMUM OFF-ROAD RECOVERY.**

[www.t-maxwinches.com](http://www.t-maxwinches.com)

Exclusive North American Distributor

Stutz Industries, LLC

P.O. Box 4544 • Elkhart, IN 46514-0544