

EW-12500 HD [Heavy Duty]

Rated Line Pull: 12500 lbs. (5665kg) Single-Line

Motor: 6.6 hp/12V, Series-Wound

Control: Remote Switch, 12' (3.7m) Lead

Gear Train: 3-Stage Planetary

Gear Ratio: 265:1

Clutch: Sliding Ring Gear

Brake: Automatic In-The-Drum

Drum Size: Diameter 2.52" (64mm) Length 8.82" (224mm)

Wire Rope: 94' ³/₈" Diameter (28.5m, 9.5mm Diameter)

Fairlead: 4-Way Roller Fairlead

Remote Control: Included

Recommended Battery: 650CCA Minimum for Winching


Battery Leads: 35mm², 72" (1.83m)

Finish: Black/Dark gray

Weight: 93 lbs. (42kg)

Overall Dimensions: (L x W x H) 21.3" x 6.3" x 8.6" (541 x 160 x 218mm)

Mounting Bolt Pattern: 10.00±0.015" x 4.50±0.010" (254.0 x 114.3mm)

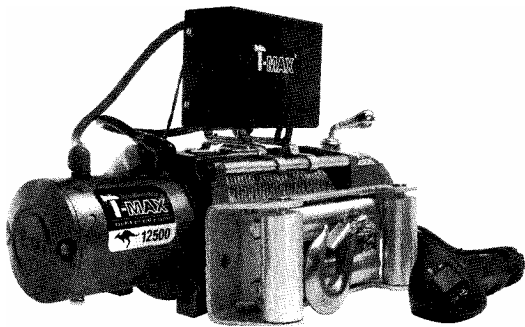

EW-12500 HD

12500 lbs. (5665kgs) Rated Line Pull.

New 6.6 hp/12V Series-Wound Motor.

94' (28.5m of ³/₈" (9.5mm) Galvanized

Aircraft. Cable with Replaceable Clevis Hook.

Line Speed & Amp Draw-First Layer

Line lbs.	No	2000	4000	600	8000	10000	1200	12500	
Pull kgs	Load	907	1814	0	3630	4532	0	5665	
Line fpm 12V		23.5	12.6	10.3	8.7	7.2	6.3	5	4.3
Speed mpm		7.2	3.85	3.15	2.65	2.2	1.9	1.5	1.3
Motor amps		70	125	165	220	275	355	405	415

12V

Line Pull & Cable Capacity

Layer of Cable		1	2	3	4
Rated Line Pull	lbs,	12500	9210	8030	6894
Per Layer	kgs	5665	4170	3640	3125
Cable Capacity	ft,	17	38	65	94
Per Layer	m	4,8	11.	20	28



National Association of Testing Authorities, Australia



MAXIMUM OFF-ROAD RECOVERY.

www.t-maxwinches.com

Exclusive North American Distributor

Stutz Industries, LLC

P.O. Box 4544 • Elkhart, IN 46514-0544