


EW-9000

Rated Line Pull: 9000 lbs. (4080kg) Single-Line
 Motor: 6.6hp/12V Series-Wound
 Control: Remote Switch, 12' (3.7m) Lead
 Gear Train: 3-Stage Planetary
 Gear Ratio: 172.8:1
 Clutch: Shift Pin Ring Gear
Brake: Automatic In-The-Drum
 Drum Size: Diameter 2.52" (64mm) Length 8.82" (224mm)
 Wire Rope: 94', 2¹/₆₄" Diameter (28.5m, 8.2mm Diameter)
Fairlead: Roller Fairlead
 Remote Control: Included
Recommended Battery: 650CCA Minimum for Winching
 Battery Leads: 25mm², 72" (1.83m)
 Finish: Black/Dark Gray
 Weight: 80.5 lbs. (36.5kg)
 Overall Dimensions: (L x W x H) 22" x 6.3" x 8.1" (557 x 160 x 205mm)
 Mounting Bolt Pattern: 10.00±0.015" x 4.50±0.010" (254.0 x 114.3mm)

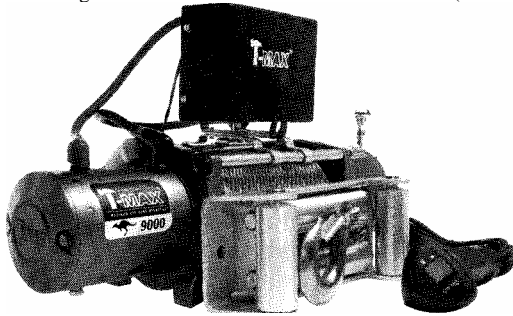

EW-9000


9000 lbs. (4080kgs) Rated Single. Line Pull.
 New 6.6 hp 12V Series-Wound Motor.
 94' (28.5m) of 9/32" (8.2mm) Galvanized
 Aircraft Cable with Replaceable Clevis Hook.

Line Speed & Amp Draw-First Layer

Line lbs.	No	200	4000	6000	8000	9000
Pull kgs	Load	(1814	2720	3630	4080
Line fpm	12	37.2	18	13.1	10.2	8.2
Speed mpm	V	11.4	5.5	4	3.1	2.5
Motor amps	12	70	190	260	335	410
Current	V					425

Line Pull & Cable Capacity

Layer of cable		1	2	3	4
Rated Line	lbs.	900	799	7237	6713
Pull	kqs	0	C	3280	3042
Cable	ft.	16	42	72	94
Capacity	m	5	12	21	28

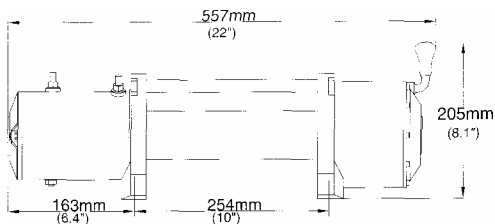


(L x W x H) 22" x 6.3" x 8.1"

EW-6500

Rated Line Pull: 6500 lbs. (2950kgs) Single-Line
 Motor: 5.51 IP Series-Wound

Control: Remote Switch, 12'(3.7m) lead
 Gear Train: 3-Stage Planetary
 Gear Ratio: 172.8:1
 Clutch: Shift Pin Ring Gear
Brake: Automatic In-The-Drum
 Drum Size: Diameter 2.5" (63.5mm) Length 5.35" (135mm)
 Wire Rope: 80', $\frac{3}{16}$ " Diameter (24m, 7.2mm Diameter)
 Fairlead: I lawse Fairlead
 Remote Control: Included
 Recommended Battery: 650CCA Minimum for Winching
 Battery Leads: 25mm², 72" (1.83m)
 Finish: Black
 Weight: 66 lbs. (30kg)
 Overall Dimensions: (L x W x H) 18.5" x 6.3" x 8.1" (470 x 160 x 205mm)
 Mounting Bolt Pattern: 6.55±0.015" x 4.50±0.010" (166.4 x 114.3mm)

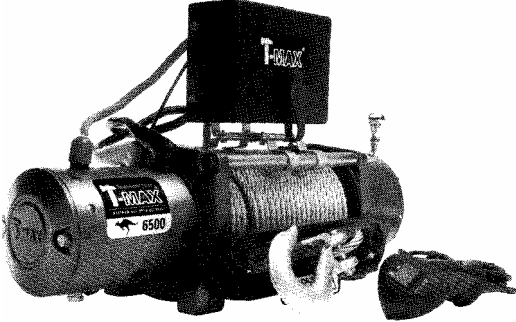

Line Speed & Amp Draw-First Layer

Line Lbs	No	1500	3000	4500	6000	6500
Pull kgs	Load	680	1360	2040	2720	2950
Line fpm 12V		37.7	19.7	16.4	11.8	9.1
Speed mpm		11.5	6	5	3.6	2.8
Motor amps		90	180	340	340	390

12V

Line Pull & Cable Capacity

Layer of Cable		1	2	3	4	5
Rated Line Pull	lbs.	6500	5400	4620	4000	3580
Per Layer	kgs	2950	2450	2090	1820	1620
Cable Capacity	ft.	14	30	48	69	80
Per Layer	m	4	9	14	21	24

EW-6500

6500 lbs. (2950kgs) Rated Single Line Pull,


5.5 hp 12V Series-Wound Motor.

94' (28.5m) of $\frac{3}{16}$ " (7.2mm) Galvanized

Aircraft Cable with Replaceable Clevis I look.

^{AL}
M²™

(LxWx H) 18.5" x 6.3" x 8.1"



National Association of Testing Authorities, Australia



MAXIMUM OFF-ROAD RECOVERY™

www.t-maxwinches.com

Exclusive North American Distributor

Stutz Industries, LLC

P.O. Box 4544 • Elkhart, IN 46514-0544